25L Acrylic tank

Model: NAC-00660

Area of use

Developed for R&D purposes. The 25L acrylic provides excellent conditions for monitoring fish behavior under RAS and flow-through systems. The sliding lid is easily removable for better accessibility. The filter can be extracted and cleaned manually.

The 25L acrylic tank standard solution is delivered with level and oxygen monitoring.

Materials

- Acrylic (Perspex)

Accessories

- Level switch
- Oxygen sensor

Hedemarken 15 | 7200 Grindsted
Denmark
E-mail: office@northaquaculture.com

Product specifications

Product no.	A (mm)	B (mm)	C (mm)	Water flow (m^3/h)
NAC-00660	220	387	410	25

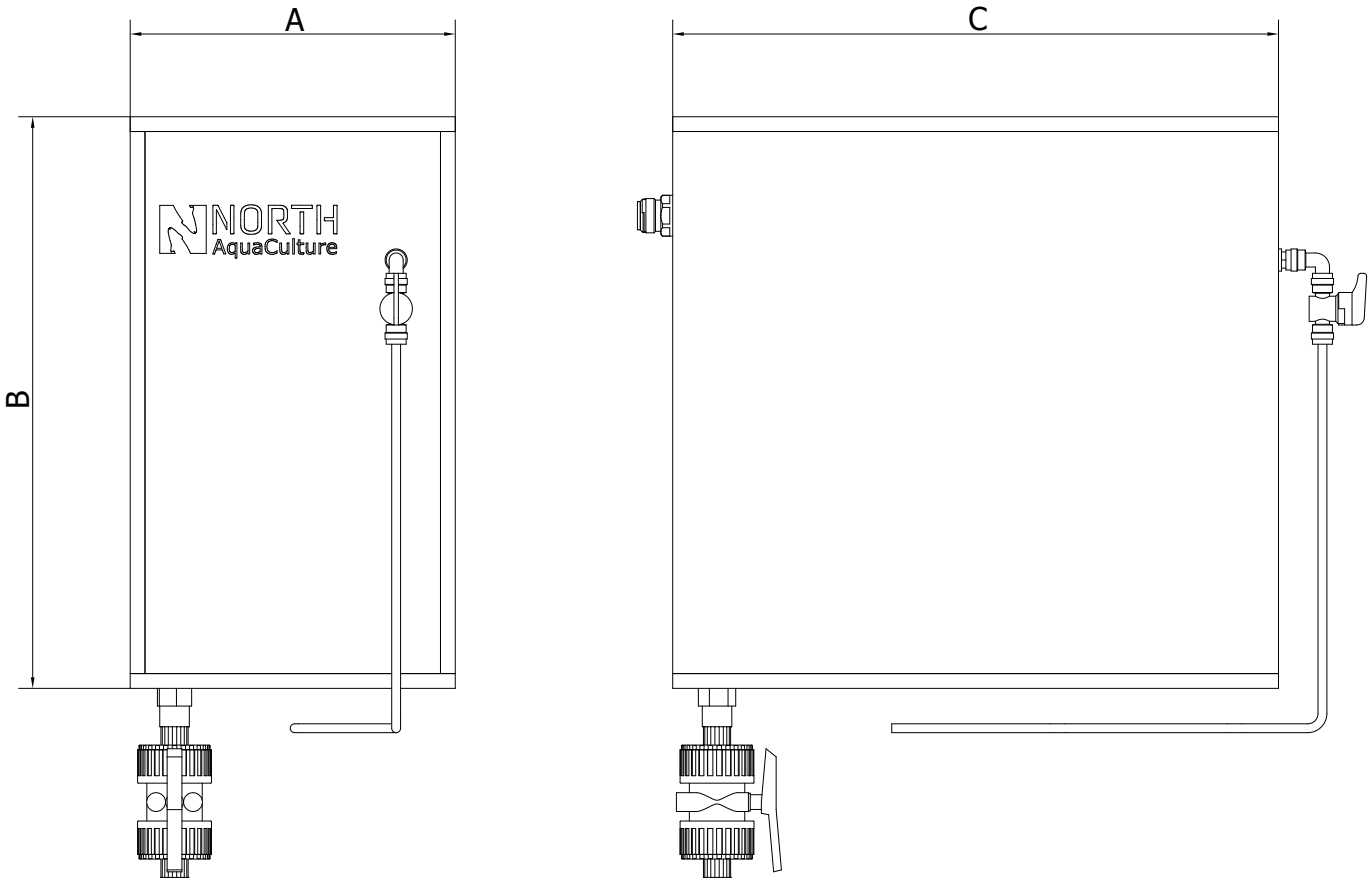

Hedemarken 15 | 7200 Grindsted
Denmark
E-mail: office@northaquaculture.com